

(1390 REV. 5-93) US DEPT. OF COMMERCE PATENT & TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER
110748

**TRANSMITTAL LETTER TO THE
UNITED STATES
DESIGNATED/ELECTED OFFICE
(DO/EO/US) CONCERNING A FILING
UNDER 35 U.S.C. 371**

U.S. APPLICATION NO.
(if known, sec 37 C.F.R.1.5)

09/937776

INTERNATIONAL APPLICATION NO.
PCT/NL00/00227INTERNATIONAL FILING DATE
April 6, 2000PRIORITY DATE CLAIMED
April 6, 1999TITLE OF INVENTION
ACTUATOR HAVING COMPACT GEAR REDUCTIONAPPLICANTS FOR DO/EO/US
Hendrikus Jan KAPAAN, Jacobus ZWARTS, Simon Jan BROERSEN

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US)
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

Items 11. to 16. below concern other document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment.
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ Entitlement to small entity status is hereby asserted.
16. ☒ Other items or information: A submission of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

U.S. APPLICATION NO. (if known, see 37 C.F.R. 1.5) 09/937776	INTERNATIONAL APPLICATION NO. PCT/NL00/00227	ATTORNEY'S DOCKET NUMBER 110748
---	--	---------------------------------

17. <input checked="" type="checkbox"/> The following fees are submitted: Basic National fee (37 CFR 1.492(a)(1)-(5)): Search Report has been prepared by the EPO or JPO\$890.00 International preliminary examination fee paid to USPTO (37 CFR 1.482)\$710.00 No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2))\$740.00 Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO\$1,040.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4)\$ 100.00 ENTER APPROPRIATE BASIC FEE AMOUNT =	CALCULATIONS	PTO USE ONLY
ENTER APPROPRIATE BASIC FEE AMOUNT =	\$890.00	

Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$	
---	--	--	--	----	--

Claims	Number Filed	Number Extra	Rate		
Total Claims	15- 20 =	0	X \$ 18.00	\$	
Independent Claims	1- 3 =	0	X \$ 84.00	\$	
Multiple dependent claim(s)(if applicable)			+ \$280.00	\$	
TOTAL OF ABOVE CALCULATIONS =				\$890.00	
Reduction by 1/2 for filing by small entity, if applicable.				-	\$
SUBTOTAL =				\$890.00	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 month from the earliest claimed priority date (37 CFR 1.492(f)).				+	\$
TOTAL NATIONAL FEE =				\$890.00	
				Amount to be refunded	\$
				Charged	\$


a. ☒ Check No. 123419 in the amount of \$890.00 to cover the above fees is enclosed.

b. ☐ Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed.

c. ☒ The Director is hereby authorized to charge any additional fees which may be required, or credit any overpayment, to Deposit Account No. 15-0461. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:
 OLIFF & BERRIDGE, PLC
 P.O. Box 19928
 Alexandria, Virginia 22320


 NAME: James A. Oliff
 REGISTRATION NUMBER: 27,075

Date: October 1, 2001

NAME: Joel S. Armstrong
 REGISTRATION NUMBER: 36,430

09/937776
09/03/01 10:05:00

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of

Hendrikus Jan KAPAAN, Jacobus ZWARTS,
Simon Jan BROERSEN

Application No.: U.S. National Stage of PCT/NL00/00227

Filed: October 1, 2001

Docket No.: 110748

For: ACTUATOR HAVING COMPACT GEAR REDUCTION

PRELIMINARY AMENDMENT

Director of the U.S. Patent and Trademark Office
Washington, D. C. 20231

Sir:

Prior to initial examination, please amend the above-identified application as follows:

IN THE CLAIMS:

Please replace claims 6-15 as follows:

6. (Amended) Actuator according to claim 1, wherein the extenric gear wheel (24) is rotatably supported with respect to the excentric hub (23) by means of a rolling element bearing (30).
7. (Amended) Actuator according to claim 1, wherein the motor (2) is an electric motor, the stator (6) of which is connected to the housing (1).
8. (Amended) Actuator according to claim 1, wherein the gear reduction mechanisme (4) is at the end of the screw mechanism (3) opposite the end thereof engaging an actuating means (38) for a brake pad (39).
9. (Amended) Actuator according to claim 1, wherein the screw (16) of the screw mechanism (3) is rotatably supported by means of a support bearing (11) with respect to a

central support shaft (13), the gear ring (23) and the gear wheel (24) of the reduction gear mechanism (4) surrounding said central support shaft (13).

10. (Amended) Actuator according to claim 1, wherein the screw (16) has a bore (35) containing a lubricant reservoir (36).

11. (Amended) Actuator according to claim 1, wherein the gear reduction mechanism (4) and a positive back-drive mechanism (37) are contained in a gear reduction module (40).

12. (Amended) Actuator according to claim 1, wherein the gear reduction module (4) comprises a central support shaft (13) for supporting the screw mechanism (3).

13. (Amended) Actuator according to claim 1, wherein the screw mechanism (3), a support bearing (11) for supporting the screw mechanism (3), the rotor (7) of the motor (2) as well as a bearing (9) for supporting the rotor (7) on the screw mechanism (3) are contained in a actuator module (41).

14. (Amended) Actuator according to claim 1, wherein the housing (1), the stator (6) and electric connections for the motor (2) are contained in a housing module (42).


15. (Amended) Brake caliper, comprising a claw piece with at least two brakes, and an actuator according to claim 1.

REMARKS

Claims 1-15 are pending. By this Preliminary Amendment, claims 6-15 are amended to eliminate multiple dependencies and typographical errors. Prompt and favorable examination on the merits is respectfully requested.

The attached Appendix includes marked-up copies of each rewritten claim (37 C.F.R. §1.121(c)(1)(ii)).

Respectfully submitted,



James A. Oliff
Registration No. 27,075

Joel S. Armstrong
Registration No. 36,430

JAO:JSA/cmm

Attachment: Appendix

Date: October 1, 2001

OLIFF & BERRIDGE, PLC
P.O. Box 19928
Alexandria, Virginia 22320
Telephone: (703) 836-6400

<p>DEPOSIT ACCOUNT USE AUTHORIZATION Please grant any extension necessary for entry; Charge any fee due to our Deposit Account No. 15-0461</p>
--

APPENDIX

Changes to Claims:

The following are marked-up versions of the amended claims:

6. (Amended) Actuator according to ~~any of the preceding claims~~, claim 1, wherein the extenric gear wheel (24) is rotatably supported with respect to the excentric hub (23) by means of a rolling element bearing (30).
7. (Amended) Actuator according to ~~any of the preceding claims~~, claim 1, wherein the motor (2) is an electric motor, the stator (6) of which is connected to the housing (1).
8. (Amended) Actuator according to ~~any of the preceding claims~~, claim 1, wherein the gear reduction mechanism (4) is at the end of the screw mechanism (3) opposite the end thereof engaging an actuating means (38) for a brake pad (39).
9. (Amended) Actuator according to ~~any of the preceding claims~~, claim 1, wherein the screw (16) of the screw mechanism (3) is rotatably supported by means of a support bearing (11) with respect to a central support shaft (13), the gear ring (23) and the gear wheel (24) of the reduction gear mechanism (4) surrounding said central support shaft (13).
10. (Amended) Actuator according to ~~any of the preceding claims~~, claim 1, wherein the screw (16) has a bore (35) containing a lubricant reservoir (36).
11. (Amended) Actuator according to ~~any of the preceding claims~~, claim 1, wherein the gear reduction mechanism (4) and a positive back-drive mechanism (37) are contained in a gear reduction module (40).
12. (Amended) Actuator according to ~~any of the preceding claims~~, claim 1, wherein the gear reduction module (40) comprises a central support shaft (13) for supporting the screw mechanism (3).
13. (Amended) Actuator according to ~~any of the preceding claims~~, claim 1, wherein the screw mechanism (3), a support bearing (11) for supporting the screw mechanism (3), the

rotor (7) of the motor (2) as well as a bearing (9) for supporting the rotor (7) on the screw mechanism (3) are contained in a actuator module (41).

14. (Amended) Actuator according to ~~any of the preceding claims~~, claim 1, wherein the housing (1), the stator (6) and electric connections for the motor (2) are contained in a housing module (42).

15. (Amended) Brake caliper, comprising a claw piece with at least two brakes, and an actuator according to ~~any of the preceding claims~~, claim 1.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

Actuator having compact gear reduction

The invention is related to an actuator, comprising a housing which contains a motor and a screw mechanism, said screw mechanism comprising a screw and a nut one of which is rotatably supported with respect to the housing, and a gear reduction mechanism connecting the rotor of the motor to the rotatable screw or nut.

Such actuator is generally known, and can be applied for various purposes such as for actuating a brake, a clutch etcetera. In many of these applications, it is desirable to have a large reduction between the motor and the object to be actuated, such as brake pads. On the other hand, overall dimensions and weight should remain limited.

The screw mechanism itself provides a reduction which i.a. depends on the pitch of the threads. A small pitch however entails rather narrow thread, which in particular for ball screws would lead to small, vulnerable balls which moreover are difficult to handle.

The gear reduction means therefore preferably should provide a relatively large reduction, such that the screw mechanism can have coarser threads which provide a lower reduction of said screw mechanism itself.

In this respect, the prior art gear reduction mechanisms are not adequate. They comprises a ring gear, satellite wheels and a crown gear. Usually, two or more of these mechanisms are arranged in series so as to obtain the required reduction. The overall dimensions and weight are high.

The object of the invention is therefore to provide an actuator having a gear reduction means with a large reduction, and with relatively small dimensions and low weight. This object is achieved in that the gear reduction mechanism comprises at least a concentric gear ring with radially inwardly directed teeth, an excentrically positioned gear wheel having radially outwardly directed teeth wherein the outer diameter of the gear wheel is smaller than the inner diameter of the gear ring, such that the teeth of said gear wheel and gear ring engage each other along a part of their circumferences, and at an opposite part of their circumferences are out of engagement, said gear wheel being rotatable accommodated on an excentric hub which is connected to the rotor of the motor.

The reduction gear means according to the invention provides a large reduction as a result of the excentric position of the gear wheel and hub. Its dimensions are small in thickness direction, leading to a compact embodiment.

Preferably, the gear ring is integrated with the screw of the screw mechanism,
5 said screw being rotatably supported with relation to the housing.

Furthermore, a very compact actuator is obtained in case the rotor of the motor is rotatably supported on the outer ring of a support bearing, said outer ring being integrated with the screw and the gear ring.

By means of a radially inwardly extending flange, the rotor may be connected to
10 the excentric hub.

Also, a positive back-drive mechanism is connected to the flange and the housing.

The actuator may be assembled from several sub assemblies such as a housing module, an actuator module and a gear reduction module.

15 According to a further embodiment, the housing may have a bore accommodating at least the nut and/or the screw, and an axially fixed part of said nut or screw, supported with respect to a radial support abutment, which extends inwardly in the bore. In this embodiment, the rotor of the motor is supported rotatably on a sleeve, said sleeve engaging the fixed part and extending away from an actuator head which is
20 movable in axial direction by means of the nut or the screw, said sleeve having a radially outwardly extending sleeve flange which is interposed between said support abutment, and the axially fixed part.

In particular, the flange of the sleeve is supported on an abutment surface of the support abutment, which faces the actuating head connected to the axially displaceable
25 nut or screw for exerting a compressive force.

The rotor sleeve is now held firmly clamped between the radial support abutment and the axially fixed part of the nut or screw, which provides a simple, reliable construction. No additional fastening means are necessary for supporting the rotor sleeve.

30 In a practical embodiment, the nut is fixedly supported within the housing, said nut having a radially outwardly extending nut flange facing the outwardly extending sleeve flange and overlapping the inwardly extending actuator support abutment.

In service of the screw actuator according to the invention, misalignment may occur as a result of eccentric forces and/or transverse forces. Such misalignment might cause damage to the balls and raceways of the nut and the screw, which are rather vulnerable to such loadings. According to the invention, this problem can be alleviated in case the outwardly facing surfaces of sleeve flange and the nut flange are curved in axial cross section, so as to allow swivelling or tilting of said nut and sleeve due to misalignment forces.

The screw/nut unit, as well as the drive unit including rotor and possible reduction means, may now move in unison so as to adapt to the misalignment.

A very stable embodiment is obtained in case the nut has a nut extension extending beyond the nut flange and inside the support abutment, the sleeve having an axially extending support part which is accommodated between said nut extension and the support abutment.

According to a preferred embodiment, the actuating head engages the screw through a rolling element bearing. Said rolling element bearing is integrated with the actuating head. A further improvement concerning stability is obtained in case the actuating head is accommodated in a cylinder, which is held non-rotatably in the bore.

The sleeve may comprise a sheet metal part which is provided with the inner raceway of at least one support bearing for rotatably supporting the rotor; alternatively, a separate bearing may be mounted with its inner ring on said sleeve.

For ease of handling and assembly, the sleeve and the nut are clampingly preassembled.

The sleeve may furthermore comprise an inwardly extending flange at its end opposite the sleeve flange, which flange carries a gear wheel of the gear reduction mechanism.

The invention will be explained further with reference to an embodiment shown in the figures.

Figure 1 shows a longitudinal section of a brake calliper comprising an actuator according to the invention.

Figure 2 shows a cross-section according to II-II of figure 1.

Figure 3 shows a further embodiment.

The actuator according to the invention comprises a housing 1, containing an electric motor 2, a gear reduction mechanism 4 and a screw mechanism 3. The housing

at its one end comprises an external screwthread 5, by means of which the actuator can be connected to e.g. a brake calliper in the case of a disc brake application.

The stator 6 of the motor 2 is connected to the housing 1, the rotor 7 of the motor is supported on a sleeve 8. This sleeve 8, by means of ball bearings 9, is in turn
5 supported with respect to the outer ring 10 of a bearing 11. The inner ring 12 of said bearing 11 is supported on a central support shaft 13, connected to the housing 1.

The central support shaft 13 engages the housing 1 through a load cell 15, and is snapfitted by means of clipping 43 accommodated in the groove 44 of the inner ring 12.

The outer ring 10 of the bearing 11 is integrated with screw 16 of screw
10 mechanism 3. This screw 16 is thus rotatably supported with respect to the housing 1. The nut 17 of the screw mechanism 4 is slidably, but not rotatably with respect to the housing. Through the screwthreads 18, 19 and balls 20, the rotary motion of the screw 16 is converted into a linear motion of the nut 17, which is contained in a cylinder space 32 in the housing 1.

15 According to the invention, the rotor 7 and the sleeve 8 carry an inwardly directed flange 21, which carries an excentric hub 23.

The excentric hub 23 rotatably supports a gear wheel 24 through bearing 30, the outer teeth of which gear wheel 24 engage the inwardly directed teeth of the ring gear 25.

20 The outer diameter of the gear wheel 24 is smaller than the internal diameter of the gear ring 25, such that over certain distance the circumferences of these gear members engage each other. At the opposite circumferential parts, they are not in engagement, which means that the gear 24 is able to excentrically rotate with respect to the gear ring 25.

25 In this manner, a great reduction of the rotations of the rotor 7 is obtained.

The brake calliper 51, shown in figure 3 comprises a screw actuator having a nut 55, which by means of balls 78 rotatably supports a screw 56. The nut 55 and screw 56 have appropriately shaped scrow type grooves 81.

The electric motor 57 has a stator 58 connected to the housing 51, as well as a
30 rotor 59 which through bearings 69 is rotatably supported on a sleeve 63. That sleeve 63 comprises a raceway 68 for the bearings 69. In the alternative, the sleeve may of course carry the inner rings of separate bearings.

Said rotor sleeve 69 has an outwardly extending sleeve flange, which is held between a radially inwardly extending support abutment 61 of the housing 51, as well as an outwardly extending nut flange 65.

5 Said outwardly extending nut flange 65, as well as the sleeve flange 63 are sitting within the bore 60 in the housing 51. The support abutment 61 extends radially inwardly with respect to the wall of the bore 60.

Non-rotatably held within the bore 60 is a cylinder 72, within which an actuating head 71 is accommodated. Through ball bearing 73, that actuating head 71 engages the screw 56 of the screw actuator 54.

10 By actuating the motor 57, the rotor 59 drives the screw 56 of the screw actuator 54, via the shaft 76. Said shaft 76 is connected on the one hand to the excentric reduction gear mechanism 4 according to figures 1 and 2, which is driven by the rotor 59 through the rotor sleeve 63 and the inwardly extending flange 74 thereof.

On the other hand, central drive shaft 76 extends into a bore 77 of the screw 56, 15 which shaft 76 is non-rotably coupled to the screw 56 through a spline/groove mechanism.

As a result, the screw 45 is rotated and moved outwardly, so as to bring the brake pad 53 closer to brake pad 52 for exerting a braking effect on a brake disk (not shown).


As a result of the compressive forces thereby exerted on the nut 55, the support 20 sleeve 63 is held firmly clamped against the support abutment 61 of the housing 51.

With the aim of accommodating misalignments, which might cause harm to the raceways and balls of the screw actuator, the sleeve flange 64 as well as the nut flange 65 may be curved preferably along the surface of an imaginary sphere, so as to allow some adaptation of the screw actuator 54 together with the rotor 59 and reduction 25 mechanism 70.

The screw 56 can be driven by means of an auxiliary drive, e.g. a hand brake drive 80, connected to drive shaft 76.

Claims

1. Actuator, comprising a housing (1), which contains a motor (2) and a screw
5 mechanism (3), said screw mechanism (3) comprising a screw (16) and a nut (17) one
of which is rotatably supported with respect to the housing (1), and a gear reduction
mechanism (4) connecting the rotor (7) of the motor (2) to the rotatable screw (16) or
nut (17), said gear reduction mechanism (4) comprising at least a concentric gear ring
10 (25) with radially inwardly directed teeth, an eccentrically positioned gear wheel (24)
having radially outwardly directed teeth wherein the outer diameter of the gear wheel
(24) is smaller than the inner diameter of the gear ring (25), such that the teeth of said
gear wheel (24) and gear ring (25) engage each other along a part of their
circumferences, and at an opposite part of their circumferences are out of engagement,
said eccentric gear wheel (24) being rotatable accommodated on an eccentric hub (23)
15 which is connected to the rotor (7) of the motor (2), characterised in that the gear ring
(25) is integrated with the screw (16) of the screw mechanism (3), said screw (16)
being rotatably supported with relation to the housing (1).

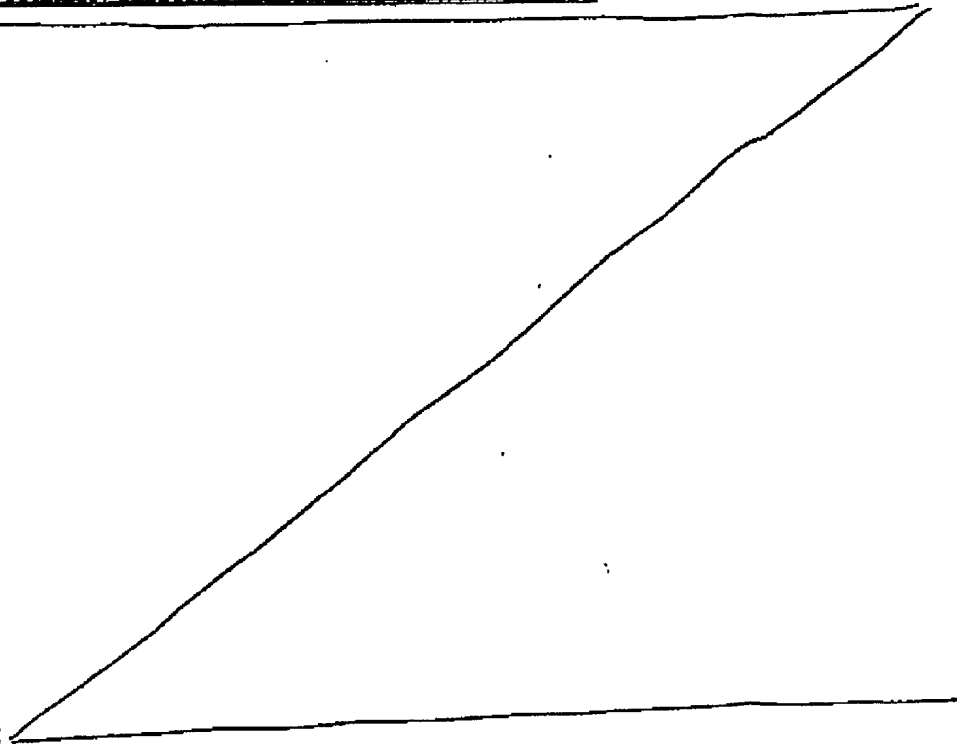

AMENDED SHEET

Claims

1. Actuator, comprising a housing (1), which contains a motor (2) and a screw mechanism (3), said screw mechanism (3) comprising a screw (16) and a nut (17) one of which is rotatably supported with respect to the housing (1), and a gear reduction mechanism (4) connecting the rotor (7) of the motor (2) to the rotatable screw (16) or nut (17), characterized in that the gear reduction mechanism (4) comprises at least a concentric gear ring (25) with radially inwardly directed teeth, an eccentrically positioned gear wheel (24) having radially outwardly directed teeth wherein the outer diameter of the gear wheel (24) is smaller than the inner diameter of the gear ring (25), such that the teeth of said gear wheel (24) and gear ring (25) engage each other along a part of their circumferences, and at an opposite part of their circumferences are out of engagement, said eccentric gear wheel (24) being rotatable accommodated on an eccentric hub (23) which is connected to the rotor (7) of the motor (2).
2. Actuator according to claim 1, wherein the gear ring (25) is integrated with the screw (16) of the screw mechanism (3), said screw (16) being rotatably supported with relation to the housing (1).
3. Actuator according to claim 1, wherein the rotor (7) of the motor (2) is rotatably supported on the outer ring (10) of a support bearing (11), said outer ring (10) being integrated with the screw (16) and the gear ring (25).
4. Actuator according to claim 3, wherein the rotor (7) by means of a radially inwardly extending flange (21) is connected to the eccentric hub (23).
5. Actuator according to claim 4, wherein a positive back-drive mechanism (30) is connected to the flange (21) and the housing (1).
6. Actuator according to claim 5, wherein the positive back-drive mechanism is a spiral spring (30).
7. Actuator according to any of the preceding claims, wherein the eccentric gear

wheel (24) is rotatably supported with respect to the excentric hub (23) by means of a rolling element bearing (30).

- 7
8. Actuator according to any of the preceding claims, wherein the motor (2) is
5 an electric motor, the stator (6) of which is connected to the housing (1).
- 9
9. Actuator according to any of the preceding claims, wherein the gear reduction
mechanism (4) is at the end of the screw mechanism (3) opposite the end thereof
engaging an actuating means (38) for a brake pad (39).
- 10
10. Actuator according to any of the preceding claims, wherein the screw (16) of
the screw mechanism (3) is rotatably supported by means of a support bearing (11)
with respect to a central support shaft (13), the gear ring (23) and the gear wheel (24) of
the reduction gear mechanism (4) surrounding said central support shaft (13).
- 15
11. Actuator according to any of the preceding claims, wherein the screw (16) has
a bore (35) containing a lubricant reservoir (36).
- 12
12. Actuator according to any of the preceding claims, wherein the gear reduction
20 mechanism (4) and a positive back-drive mechanism (37) are contained in a gear
reduction module (40).
- 13
13. Actuator according to any of the preceding claims, wherein the gear reduction
module (40) comprises a central support shaft (13) for supporting the screw mechanism
25 (3).
- 14
14. Actuator according to any of the preceding claims, wherein the screw
mechanism (3), a support bearing (11) for supporting the screw mechanism (3), the
rotor (7) of the motor (2) as well as a bearing (9) for supporting the rotor (7) on the
30 screw mechanism (3) are contained in a actuator module (41).
- 15
15. Actuator according to any of the preceding claims, wherein the housing (1),

the stator (6) and electric connections for the motor (2) are contained in a housing module (42).

16. Actuator according to one claim 1, comprising a housing (55), a nut (55) and a screw (56) one of which is axially fixed with respect to the housing (51) and the other of which is axially displaceable with respect to the housing (51) for moving an actuating head (71), as well as a motor (57) which comprises a stator (58) connected to the housing (51), and a rotor which is drivingly connected to a rotatable part (56) of the screw actuator (54), the housing (51) having a bore (60) accommodating at least the nut (55) and/or screw (56), an axially fixed part (55) of said nut (55) or screw (56) being supported with respect to a radial support abutment (61) which extends inwardly in the bore (60), wherein the rotor (59) of the motor (57) supported rotatably on a sleeve (63), said sleeve (63) engaging the fixed part (55) and extending away from the actuating head (71), said sleeve (63) having a radially outwardly extending sleeve flange (64) which is interposed between said support abutment (61), and the axially fixed part (55).
17. Actuator according to claim 16, wherein the flange (54) of the sleeve (63) is supported on an abutment surface (62) of the support abutment (61) which faces an actuating head (71) connected to the axially displaceable nut (55) or screw (56) for exerting a compressive force.
18. Actuator according to claim 16 or 17, wherein the nut (55) is fixedly supported within the housing (51), said nut (55) having a radially outwardly extending nut flange (65) facing the outwardly extending sleeve flange (64) and overlapping the inwardly extending support abutment (61).
19. Actuator according to claim 18, wherein the outwardly facing surfaces of sleeve flange (64) and the nut flange are curved in axial cross section, so as to allow swivelling or tilting of said nut and sleeve due to misalignment forces.
20. Actuator according to claim 18 or 19, wherein the nut (55) has a nut extension (66) extending beyond the nut flange (65) and inside the support abutment (61), the sleeve (63) having an axially extending support part (67) which is accommodated between said nut extension (66) and the support abutment (61).

AMENDED SHEET

31. Actuator according to claim 30, wherein the gear wheel mechanism (4) is connected to a central drive shaft (76) which is rotatably supported in the housing (51) and which extends into a bore (77) in the screw (76), said drive shaft (76) being non-rotatably coupled to the screw (56) through a spline/groove mechanism.
- 5
32. Actuator according to claim 31, wherein a lubricant dosing module (79) is accommodated in the bore (60) of the screw (66).
- 15
33. Brake calliper, comprising a claw piece with at least two brakes, and an
- 10 actuator according to any of the preceding claims.

1/2

fig - 1



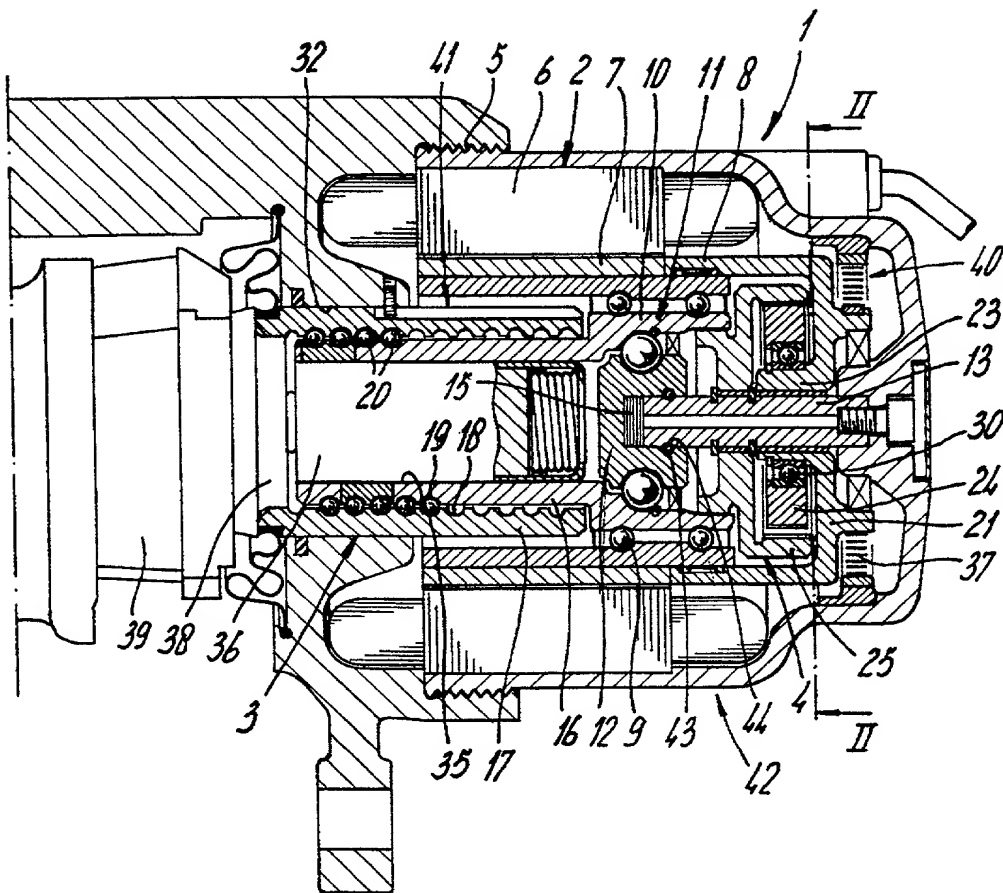


fig - 2

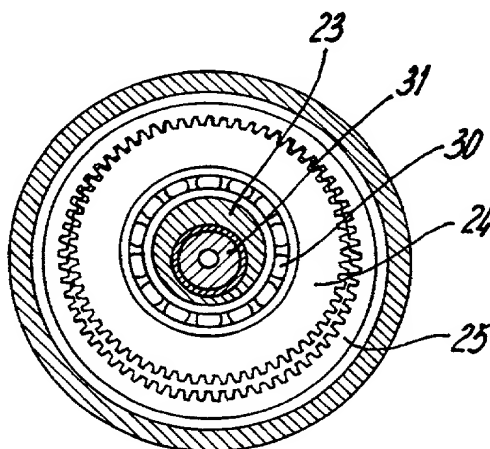

2/2

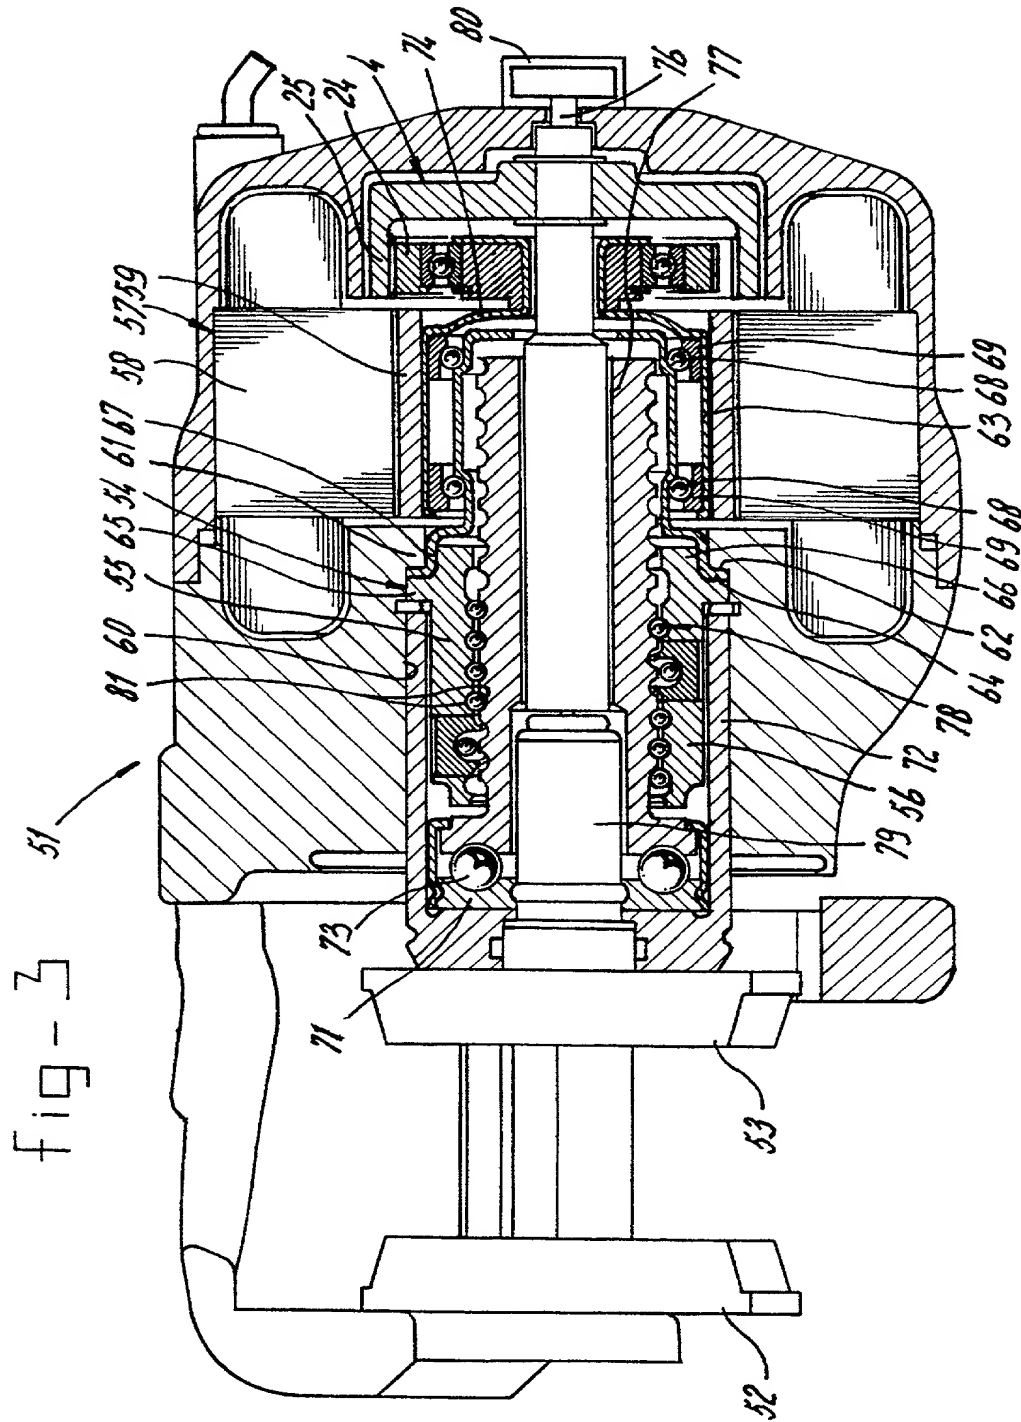

- d. ☐ no such applications have been filed
e. ☒ such applications have been filed as follows

**EARLIEST FOREIGN APPLICATION(S), IF ANY FILED WITHIN 12 MONTHS
(6 MONTHS FOR DESIGN) PRIOR TO SAID APPLICATION**

Country	Application Number	Date of filing (day, month, year)	Date of Issue (day, month, year)	Priority claimed
the Netherlands	1011731	6 April 1999		Yes

**ALL FOREIGN APPLICATION(S), IF ANY FILED MORE THAN 12 MONTHS
(6 MONTHS FOR DESIGN) PRIOR TO SAID APPLICATION**

CONTINUATION-IN-PART

(Complete this part only if this is a continuation-in-part application)

I hereby declare claim the benefit under Title 35, United States code, paragraph 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claim of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, paragraph 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, paragraph 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.) (Filing date) (Status) (patented, pending, abandoned)

(Application Serial No.) (Filing date) (Status) (patented, pending, abandoned)

POWER OF ATTORNEY

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

The undersigned, the above-noted Applicant, hereby revokes all previous powers of attorney and appoint the following as attorneys of record with full power of substitution and revocation to prosecute this patent application and all continuations and divisions thereof, and to transact all business in the Patent and Trademark Office:

James A. Cliff, Registration No. 27,076;
William P. Berridge, Registration No. 20,024;
Kirk M. Hudson, Registration No. 27,882;
Thomas J. Pardini, Registration No. 30,411; and
Edward P. Walker, Registration No. 31,4500.

ALL CORRESPONDENCE IN CONNECTION WITH APPLICATION SHOULD BE SENT TO CLIFF & BERRIDGE, P.O. BOX 18928, ALEXANDRIA, VIRGINIA 22320, TELEPHONE: (703) 836-6400.

COMBINED DECLARATION AND POWER OF ATTORNEY

(ORIGINAL DESIGN, NATIONAL STAGE OF PCT OR CIP APPLICATION)

As a below named inventor, I hereby declare that

My residence, post office address and citizenship are as stated below next to my name, I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Actuator having compact bear reduction

the specification of which: (complete (a), (b) or (c) for type of application)

REGULAR OR DESIGN APPLICATION

a. ☐ is attached hereto.

b. ☐ was filed on
Serial No.

(if applicable)

as Application
and was amended on

PCT FILED APPLICATION ENTERING NATIONAL STAGE

c. ☒ was described and claimed in International application No. PCT/NL00/00227
filed on 6 April 2000
and as amended on

(if any)

ACKNOWLEDGEMENT OF REVIEW OF PAPERS AND DUTY OF CANDOR

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, paragraph 1.56(a).

In compliance with this duty there is attached an information
disclosure statement 37 CFR 1.97

PRIORITY CLAIM

I hereby claim foreign priority benefits under Title 35, United States Code paragraph 119 of any foreign application (s) for patent of inventor's certificate listed below and have also identified below any foreign application for patent of inventor's certificate having a filing date before that of the application on which priority is claimed.

statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that wilful false statements and the like so made are punishable by fine or imprisonment, or both under Section 1001 of Title 18 of the United States Code and that such wilful false statements may jeopardize the validity of the application or any patent issued thereon.

100 Full name of sole or first inventor: KAPPAAN, Hendrikus Jan

Inventor's signature



Date 8 October 2001

Country of Citizenship: the Netherlands

Residence: Nieuwegein, the Netherlands

NLX

Post Office Address: Waterhoen 5, NL-3435 DM NIEUWEGEIN, the Netherlands

200 Full name of second inventor: ZWARTS, Jacobus

Inventor's signature



Date 8 October 2001

Country of Citizenship: the Netherlands

Residence: Nieuwegein, the Netherlands

NLX

Post Office Address: Carmenlaan 5, NL-3438 VA NIEUWEGEIN, the Netherlands

300 Full name of third inventor: BROERSEN, Simon Jan

Inventor's signature



Date 8 October 2001

Country of Citizenship: the Netherlands

Residence: Nieuwegein, the Netherlands

NLX

Post Office Address: Lichtegaarde 41, NL-3436 ZS NIEUWEGEIN, the Netherlands

CHECK PROPER BOX(ES) FOR ANY ADDED PAGE(S) FORMING A PART OF THIS DECLARATION